



THICKNESS OF CURB AND
GUTTER TO MATCH
PAVEMENT CROSSSECTION
ON MAJOR ROADS

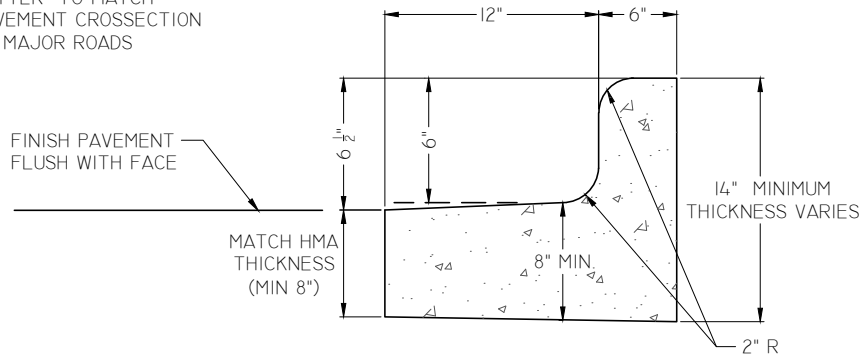

18" CONCRETE ISLAND CURB & GUTTER


NOT TO SCALE

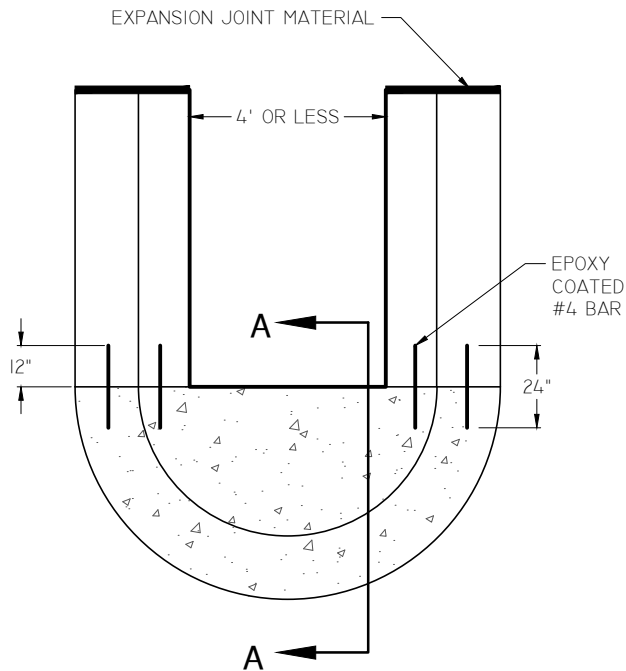

EPOXY COATED # 4 BAR IS TO BE
NO LESS THAN 24" IN LENGTH
AND EXTEND 12" INTO NOSE OF
ISLAND CURB & GUTTER AND 12"
INTO MAIN LINE CURB & GUTTER

THE NOSE OF THE ISLAND SHALL
BE POURED SOLID FROM
BEGINNING OF RADIUS TO END OF
RADIUS.

EXPANSION MATERIAL SHALL BE
PLACED AT THE CURB AND
GUTTER JOINT PRIOR TO THE #
4 BAR OR AS DIRECTED BY THE
ENGINEER

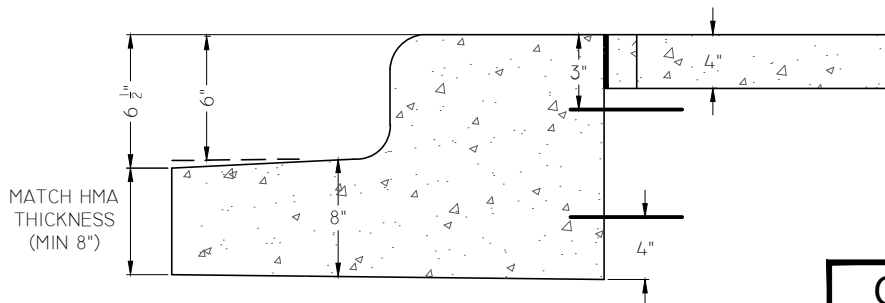

PROFILE A-A

18" CONCRETE ISLAND CURB & GUTTER

MEDIAN ISLAND NOSE

NOT TO SCALE

USE WHEN THE ISLAND IS 4' OR LESS
FROM BACK OF CURB TO BACK OF CURB

CITY OF WYOMING
ENGINEERING DEPARTMENT

18" CONCRETE ISLAND CURB & GUTTER

DRAWN BY - KM

CHECKED BY - JO

DATE DRAWN - 3-2021

DATE REVISED - 3-2021

I-25B